Dismantling information

The document is intended for use by end-of-life recyclers or treatment facilities. It provides the basic instructions for the disassembly of LG products to remove components and materials requiring selective treatment.

Product Identification

Type of Product	**OLED TV**
Model name	**OLED48/55/65/77B5 Series** **This document covers derivation model OLED48/55/65/77B5### which has same conceptual design and dismantling process.**

Displays must be stored in accordance with the requirements stipulated in Appendix VII (1) or (2) of Directive 2012/19/EU and must, amongst other things, be stored in a weatherproof manner. Containers with covers must be used when storing and transporting the Displays.

Contents

1. Materials and components for Selective Treatment
2. Tools Required
3. Product Dismantling Process

1. Materials and components for Selective Treatment

Displays may contain hazardous substance like Pb which are covered by exemptions under the RoHS directive. However, the majority is present in the PCB assembly. In order to reduce emissions as much as possible, a complete disposal of the old appliance is required. This treatment may only be performed in authorized handling plants.

Materials and components	Notes	Included
Printed Circuit Boards (PCB) or Printed Circuit Assemblies (PCA)		O
Batteries	For Remote control	O
	Internal coin batteries	-
Mercury containing components	Display backlights	-
Liquid Crystal Displays (LCD) with a surface greater than 100 square cm (Includes background illuminated displays with gas discharge lamp)	LCD Module, LED Module, OLED Module (LED or OLED maybe used depending on model)	O
Capacitors / condensers (Containing PCB / PCT)		-
Electrolytic Capacitors / Condensers measuring greater than 2.5 cm in diameter or height		O
External electric cables cords	Power cord	O
Gas Discharge Lamps		-
Plastics containing Brominated Flame Retardants	Plastic of speaker, cable connector, fan (depend on model)	O
Components and waste containing asbestos		-
Components, parts and materials containing refractory ceramic fibers		-
Components, parts and materials containing radioactive substances		-

2. Tools Required


List the type that would typically be used to disassemble the product to a point where components and materials requiring selective treatment can be removed.

Tool Description	Tool information
Screw driver	 
Nipper	

3. Product Dismantling Process

1) Batteries

Batteries can easily be removed from the remote control once the back cover of the remote control has been removed.

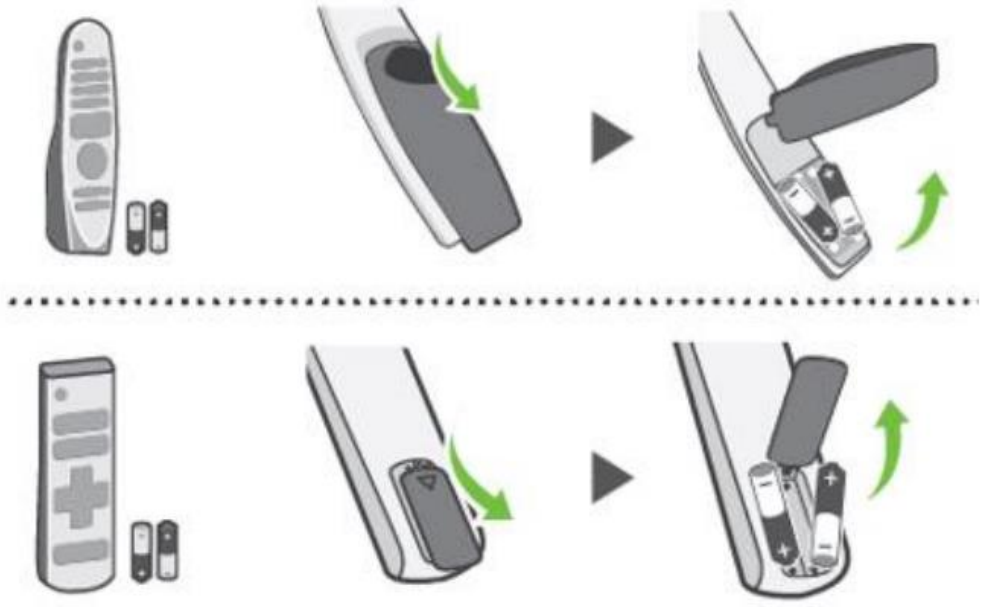

3. Product Dismantling Process

2) PCBs, WiFi, IR and OLED Module 48B5

The back cover of the display can easily be removed by hand and screw driver.


Remove the Screw



Location of the latches





Pull the Back Cover by firstly detaching the Power Cord Bracket





Once removed, this will expose the accessible electronic units (PCBs) which can now be easily removed with hand and screwdriver.



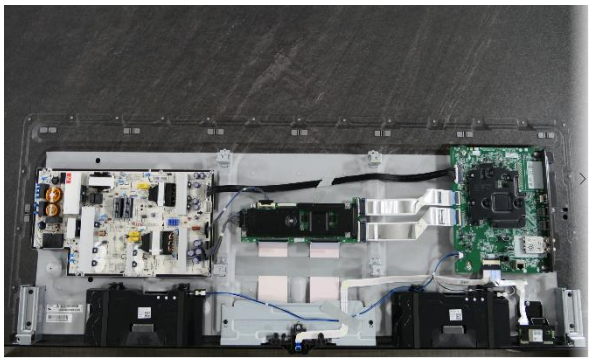





OLED Panel (together with their casing) is only left after all other parts like electronic units have been removed.




Remove the IR Supporter

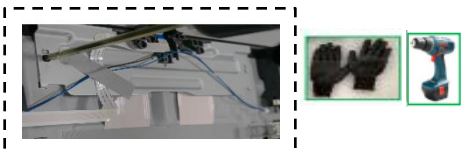

Remove Wi-Fi Bracket




Remove the VESA Bracket

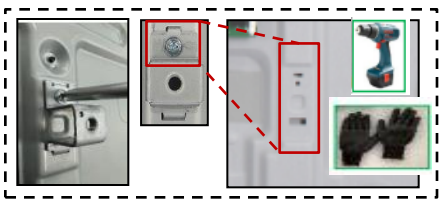

Remove Stand Supporter



Remove the IR Module

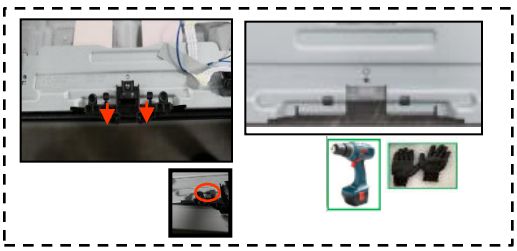

Remove the Speaker



3. Product Dismantling Process

2) PCBs, WiFi, IR and OLED Module 55/65B5

The back cover of the display can easily be removed by hand and screw driver.


Remove the Screw



Location of the latches





Pull the Back Cover by firstly detaching the Power Cord Bracket





Once removed, this will expose the accessible electronic units (PCBs) which can now be easily removed with hand and screwdriver.



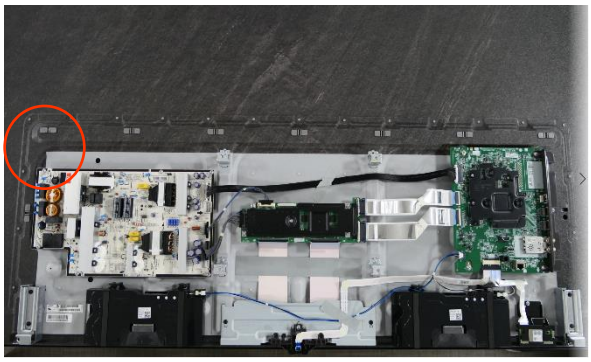





OLED Panel (together with their casing) is only left after all other parts like electronic units have been removed.




Remove the IR Supporter

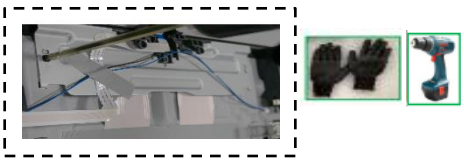


Remove Wi-Fi Bracket



Remove the VESA Bracket

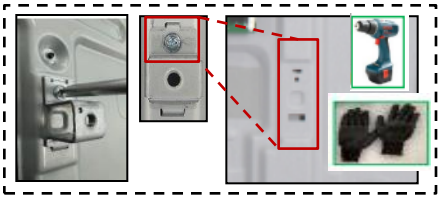


Remove the IR Module

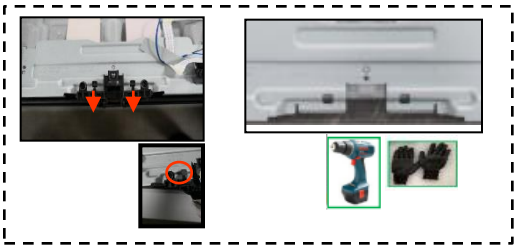

Remove the Speaker



Remove Stand Supporter



3. Product Dismantling Process


2) PCBs, WiFi, IR and OLED Module 77B5

The back cover of the display can easily be removed by hand and screw driver.


Remove the Screw




Location of the latches

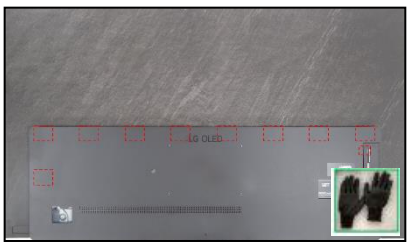



Pull the Back Cover by firstly detaching the Power Cord Bracket





Once removed, this will expose the accessible electronic units (PCBs) which can now be easily removed with hand and screwdriver.



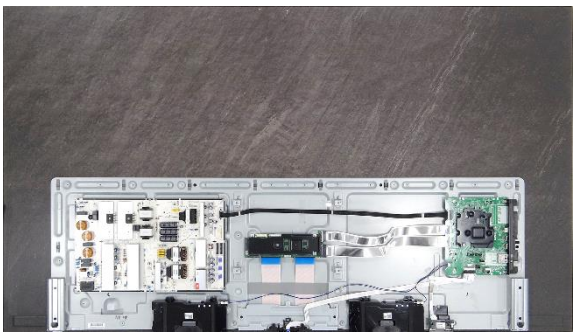





OLED Panel (together with their casing) is only left after all other parts like electronic units have been removed.




Remove the IR Supporter

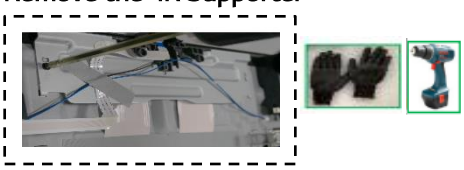


Remove Wi-Fi Bracket




Remove the VESA Bracket

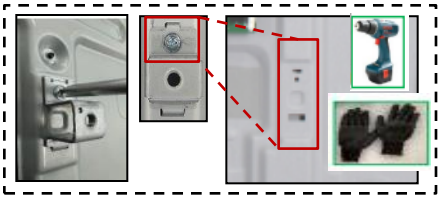


Remove the IR Module

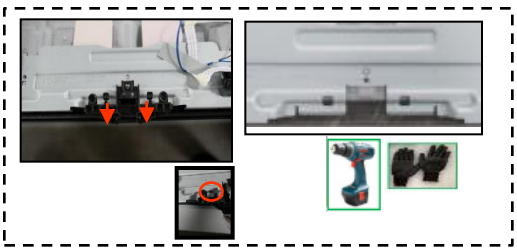

Remove the Speaker Upward

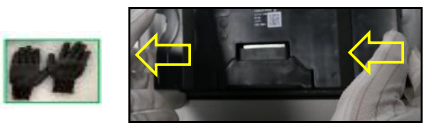

Remove Stand Supporter



3. Product Dismantling Process

3) Plastic containing Brominated Flame Retardants
Plastic of speaker, fan, cable connector may contain brominated flame retardants, remove them all using a common available tool.

4) OLED Module
OLED (together with their casing) is only left after all other parts like electronic units have been removed



OLED48B5



OLED55B5



OLED65B5



OLED77B5

3. Product Dismantling Process


5) Power Cord

A Power Cord plugged into the back of the display can easily be removed by hand and screw driver.







6) Capacitors >25 mm

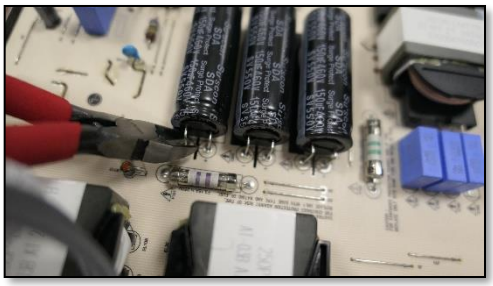


OLED77B5

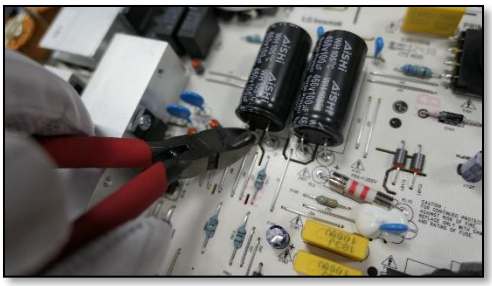

OLED65B5

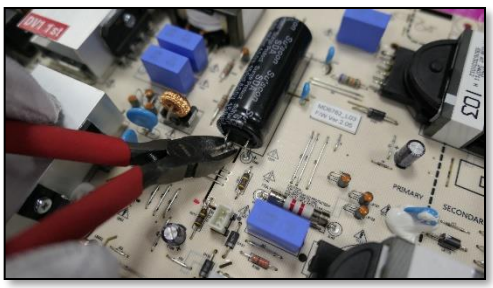

OLED55B5

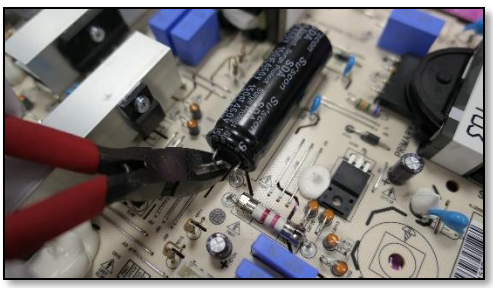

OLED48B5